


COUNTER DOORS WITH SILL & TRIM

20

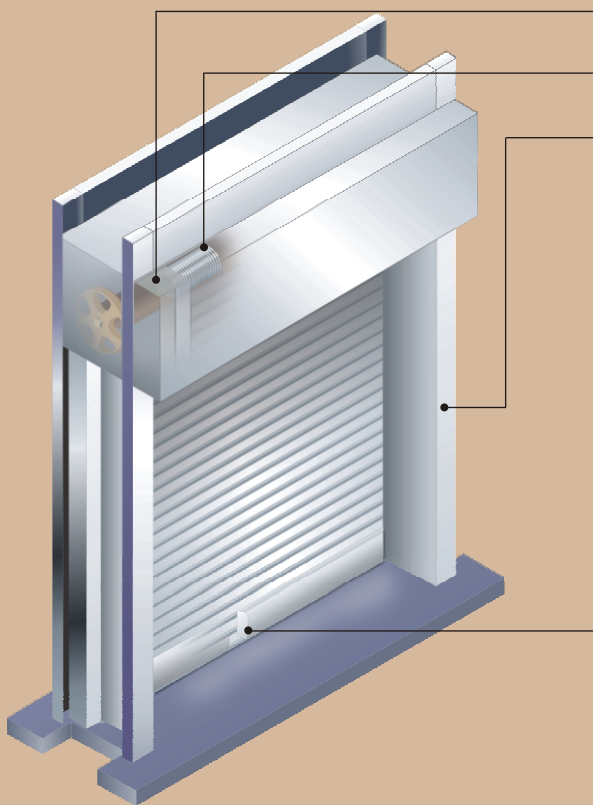

- 10" bracket on all door sizes increases clear opening height
- Oil tempered torsion springs designed for 20,000 life cycles
- 16 gauge stainless steel trim with 14 gauge sill in #4 finish
- Tubular bottom bar to conceal all locking mechanisms
- Split frame construction allows unit to be installed after door opening is finished
- Can be installed in any wall thickness ranging from 3 1/2" to 16"
- Curtain and Bottom Bar finish
 - FinalCote™ (Standard)(Tan, White, or Gray)
 - ColorCote™
 - 180 Standard Colors (Optional)
 - Unlimited Custom Colors (Optional)
 - Stainless Steel #4 Polish
 - Aluminum (Clear or Bronze Anodized)
- Choice of Operation
 - Push-Up - limit 11' wide for aluminum doors
 - limit 9' wide for steel doors
 - Crank
 - Motor







Single Unit Frames and Curtains

A single, completely unitized frame and curtain to provide a neat, compact package for a variety of counter openings.

COUNTER DOORS WITH SILL & TRIM MODEL NUMBERS

	OPERATION		
	Push-Up	Crank	Motor
CDF	●		
CDF-K		●	
CDF-M			●

TYPICAL DETAILS

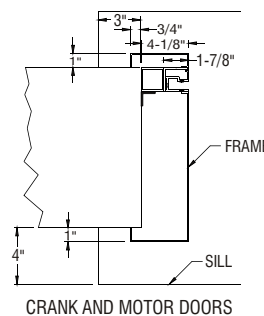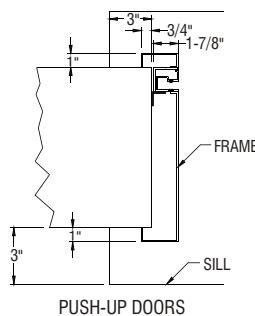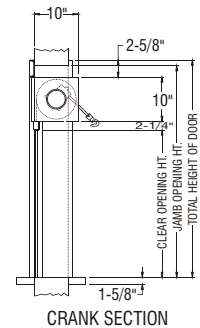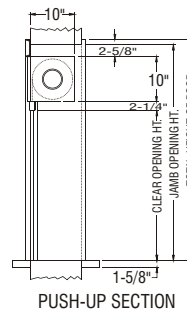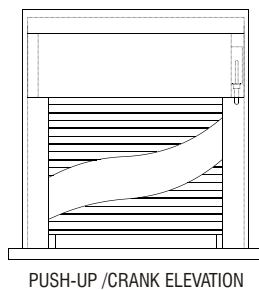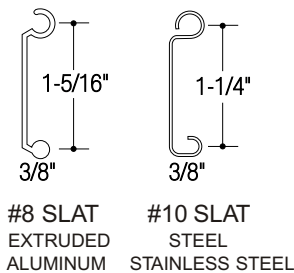

© Dimensions shown are for initial design. For final design and specifications, visit cooksondoor.com.