



# MG Operator with Lock Interlock 208 / 230VAC 3 Phase Right Hand For 1/3HP and 1/2HP

EN 305 R

- NOTES:
- R-BRAKE RELAY (COIL 220VAC)
  - R3-INTERLOCK RELAY (COIL 24VAC)
  - LSA-LS1 & LS3 MICROSWITCH CONNECTOR
  - LSB-LS2 & LS4 MICROSWITCH CONNECTOR
  - LSC-OPEN CONTROL CONNECTOR
  - LSD-CLOSE CONTROL CONNECTOR
  - LS5-INTERNAL INTERLOCK MICROSWITCH
  - LSA1-MANUAL CUT-OFF MICROSWITCH
  - LSB1-INTERNAL INTERLOCK MICROSWITCH



- TERMINAL NUMBER:
- 1 CONTROL STATION-STOP
  - 2 CONTROL STATION-OPEN
  - 3 CONTROL STATION-CLOSE
  - 4 CONTROL STATION-COMMON
  - 4&4A JUMP FOR MOMENTARY CONTACT CLOSE
  - 5&6 SENSING-EDGE (S.E.) CONNECTION
  - 7&8 DOOR CLOSING WARNING SIGNAL 24VAC
  - 9&10 EXTERNAL INTERLOCK

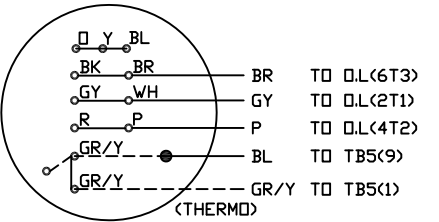

208V/230V 3 PHASE  
MOTOR CONNECTION

