
OPTIONS SHEET

SAFETYGARD UL325 LIGHT CURTAIN

For Service Doors, VertiStack[®] Clear Door, Insulated Doors, Counter Doors and Grilles

RELIABLE NON-CONTACT SAFETY SOLUTION

The SafetyGard UL325 Approved Light Curtain is the perfect non-contact primary entrapment device that prevents damage to an object in the door's pathway in addition to minimizing damage to the closure itself.

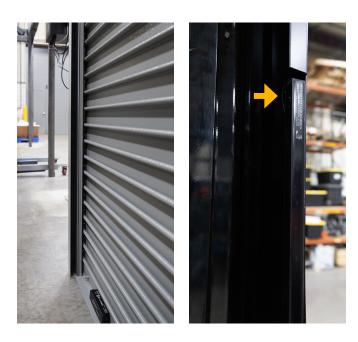

OPTIONS

 Available in 3' and 6', providing more significant coverage than a photo eye. The size will depend on the height of the opening.

ADDITIONAL FEATURES

- Improved aesthetics by eliminating the visibility of the sensing edge in the opening. It protrudes only 1 1/2" from the guide, offering minimal disruption and a clean look.
- Dynamic sequential blanking to eliminate the light curtain being triggered by door deflection due to wind.
- The extruded mounting channel easily attaches to the guide design, allowing for easy installation.



